

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
8 April 2004 (08.04.2004)

PCT

(10) International Publication Number  
WO 2004/029580 A3

- (51) International Patent Classification: G01N 27/447, (74) Agents: JI, Yonggong et al.; Amersham Biosciences Corp, 800 Centennial Avenue, Piscataway, NJ 08855 (US).  
27A53
- (21) International Application Number: PCT/US2003/030362
- (22) International Filing Date: 25 September 2003 (25.09.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 60/413,523 25 September 2002 (25.09.2002) US
- (71) Applicant (for all designated States except US): AMERSHAM BIOSCIENCES (SV) CORP [US/US]; 928 East Arques Avenue, Sunnyvale, CA 94085 (US).
- (72) Inventors; and  
(75) Inventors/Applicants (for US only): BLAGA, Iuliu-Ioan [RO/US]; 40771 Robin Street, Fremont, CA 94538 (US).  
Ni, Jing [CN/US]; 1063 Morse Avenue, Apt. 10307, Sunnyvale, CA 94089 (US). NIELSEN, William, D. [US/US]; 3860 Sophist Drive, San Jose, CA 95132 (US).
- Published:  
— with international search report
- (88) Date of publication of the international search report: 1 July 2004
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: HIGH DENSITY FLUIDIC CHIP DESIGN AND METHOD OF SAMPLE INJECTION

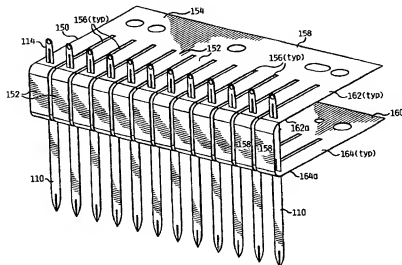

(57) Abstract: The present invention discloses a high-density parallel channel design for a microfabricated capillary array electrophoresis chip, with vertical T or double T design for sample injection. An alternative embodiment of the invention includes closed, buffer reservoirs with integrated electrodes and buffer feeding ports. Also disclosed are novel sample loading and injection methods, including the use of using either a capillary array connected to an electrode, or an array of metal pens (110) as the loader/electrode.

WO 2004/029580 A3